


H TECHNICAL BULLETIN

HT250U-7.5-517 TRAILER AIR SUSPENSION TOP PLATE IMPROVEMENT

No: TRAILER AUS-005
Subject: *Product Update*
Date: July 1996 Revision: A

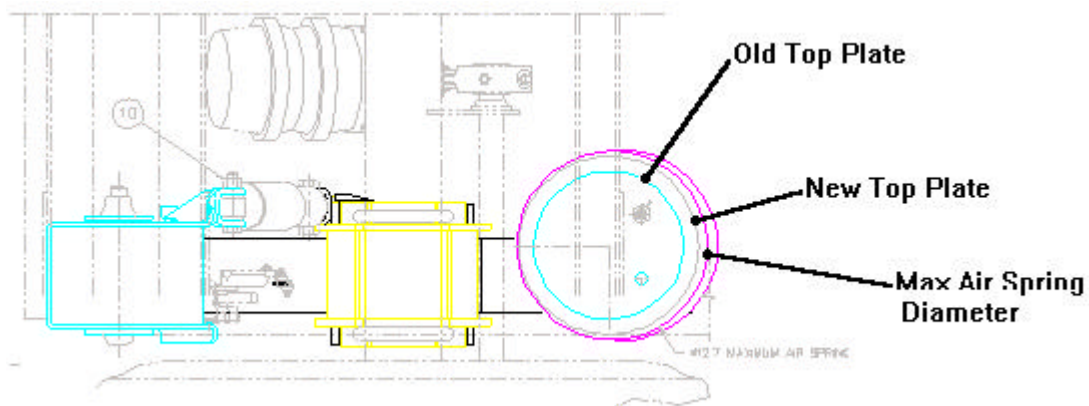

Description

As part of our continuous product improvement program, Hendrickson has increased the diameter of the upper air spring plate on our HT250U-7.5-517 trailer air suspension. This improvement is intended to improve air spring durability by providing a larger surface for the compressed air spring to contact.

The upper air spring plate has increased from 10" (244mm) to 12" (300mm). Hendrickson specifies in installation drawings that the trailer design must allow a clearance of 12.7" in diameter for the expansion of the air spring. Consequently clearance changes should not be necessary for the improved top plate.

This detail is included in the current installation drawing for the suspension. Production staff however should be made aware of the change to allow for any tooling adjustments which may be required.

If any further installation detail or assistance is required, contact the Hendrickson Customer Excellence Centre on (03) 9767 3400.