


H SPECIFICATIONS

HT250TB

LIT NO: L223

DATE: May 2000

REVISION: A

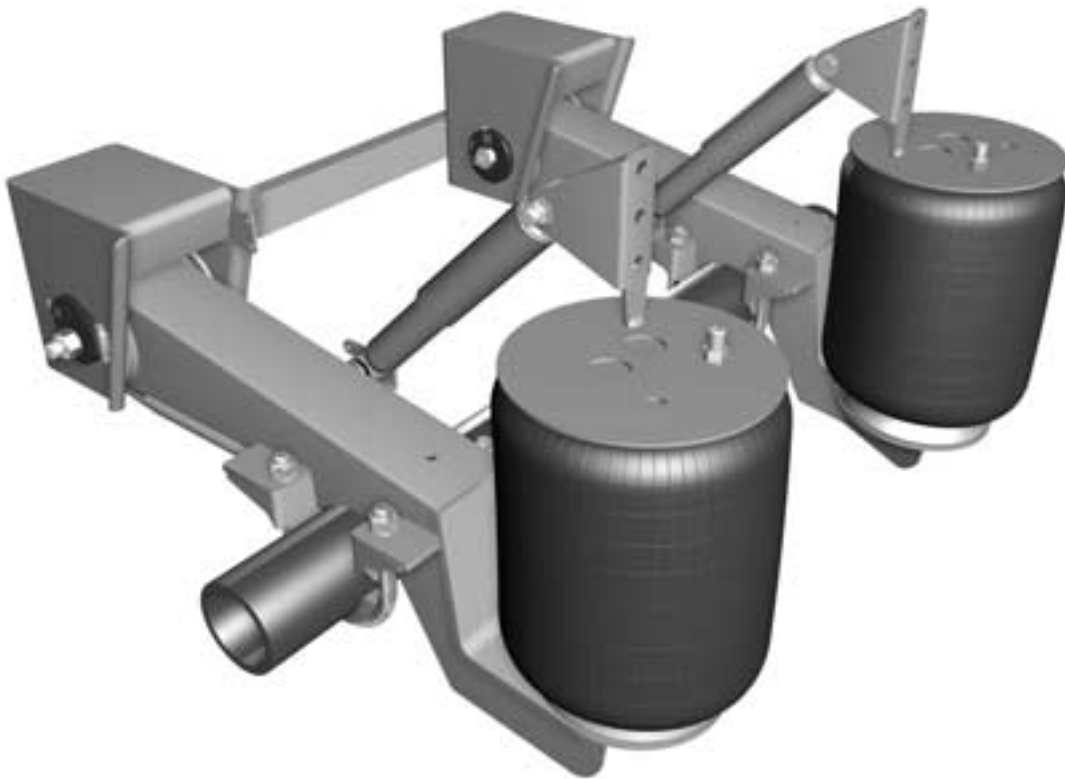

For The Road Ahead

H HENDRICKSON

APPLICATIONS

CAPACITY:	25,000 lbs. (11 250 kg)*	
TRAILER TYPES:	UNITED STATES AND CANADA Platform Specialty Grain Livestock	MEXICO, CENTRAL AND SOUTH AMERICA None
**AXLE DATA:	5-inch diameter round	
AXLE ARRANGEMENT:	Single; tandem: 122-inch maximum axle spacing Tri or quad: 144-inch maximum total spacing	
FRAME TYPES:	Steel or aluminum; 96-inch or 102-inch wide trailers	

*Can be used in place of HT230 suspensions or in conjunction with certain other suspensions when used as a liftable.

**Hendrickson recommends 5/8-inch nominal wall thickness.

MODEL CHART

SUSPENSION MODEL NUMBER	RISE HEIGHT ¹ (inches)	JOUNCE (inches)	REBOUND (inches)	WEIGHT ² (pounds)
HT250TB12-001	12	4.0	5.2	347
HT250TB14-001	14	6.0	3.2	347
HT250TB15-001	15	6.5	3.0	350
HT250TB16-001	16	6.1	2.9	369
HT250TB17-001	17	6.5	3.0	372

¹Other ride heights and mounting types available.

²Weights shown do not include the axle or the frame bracket cross member.

NOTES:

HT250TB models feature wingless style hangers with QUIK-ALIGN® pivot connection.

HT250TA models with winged QUIK-ALIGN hangers and HT250T models with welded collar alignment are also available.

Trailer Suspension Systems
2070 Industrial Place SE
Canton, OH 44707-2600 USA
330.456.7288
Fax 330.456.0105



Trailer Suspension Systems
250 Chrysler Drive, Unit #3
Brampton, ON L6S 6B6 Canada
905.789.1030
Fax 905.789.1033