


# **H** HT SERIES HT300U SPECIFICATIONS

LIT NO: L127

DATE: December 1999 REVISION: A

---

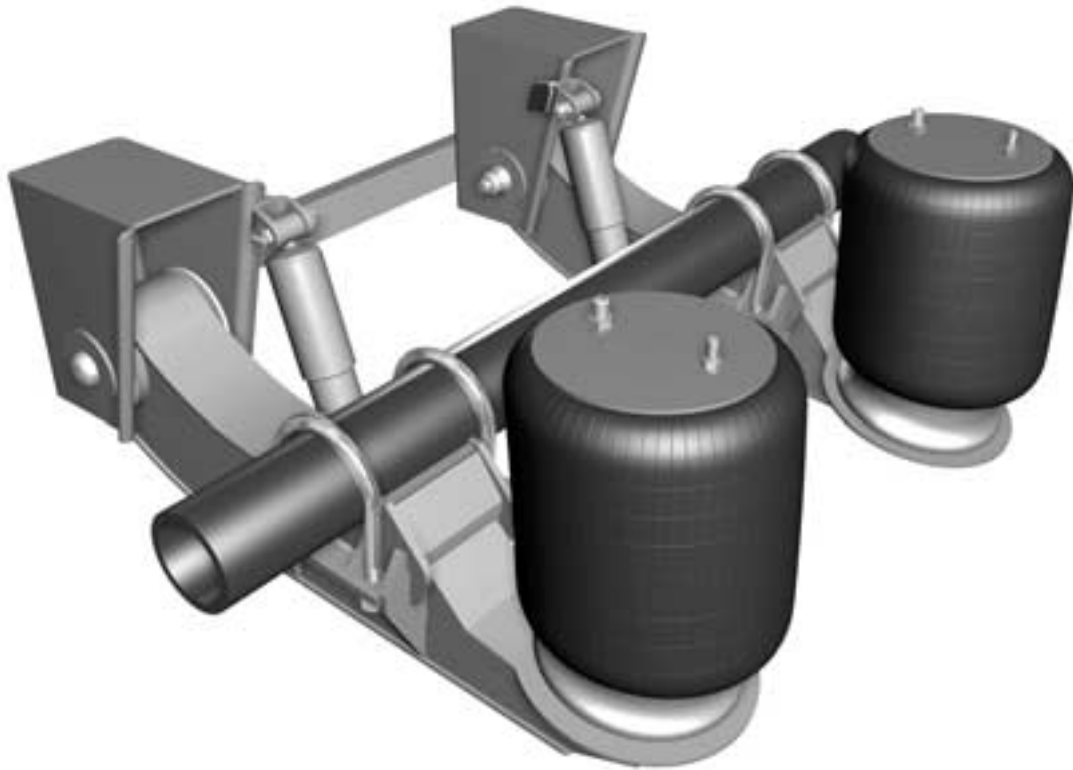

---

*For The Road Ahead*

**H** HENDRICKSON

## APPLICATIONS

<b>CAPACITY:</b>	30,000 lbs (13 600 kg)		
<b>TRAILER TYPES:</b>	<b>UNITED STATES AND CANADA</b> Chip Van Flat Lowboy/Drop Deck Dump Tanker Logging Grain	<b>MEXICO, CENTRAL AND SOUTH AMERICA</b> Drop Deck Van Auto Hauler Container Chassis Chip Van Flat Lowboy/Drop Deck Dump	Tanker Logging Grain Livestock
<b>AXLE DATA:</b>	5-inch diameter round		
<b>AXLE ARRANGEMENT:</b>	Single; tandem: 122-inch maximum axle spacing Tri- or quad axle: 144-inch maximum total spacing		
<b>FRAME TYPES:</b>	Steel or aluminum; 96-inch or 102-inch wide trailers		

## MODEL CHART

SUSPENSION MODEL NUMBER <sup>1</sup>	RIDE HEIGHT (inches)	JOUNCE (inches)	REBOUND (inches)	WEIGHT <sup>2</sup> (pounds)
HT300U-9-001	9	4.68	4.52	462
HT300U-12-001	12	5.8	3.4	490
HT300U-14-001	14	6.1	3.7	498
HT300U-17-001	17	6.1	3.9	538

<sup>1</sup>Other models and options are available.

<sup>2</sup>Weights shown do not include the axle or the frame bracket crossmember.



A Boler Company

2070 Industrial Place SE • Canton, Ohio 44707-2600 USA  
Phone (330) 456-7288 • Fax (330) 456-0105

250 Chrysler Drive, Unit #3 • Brampton, Ontario L6S 6B6 CAN  
Phone (905) 789-1030 • Fax (905) 789-1033